

The **NORCHEM AnCAT Model 054GS-100** automatic liquid polymer system is designed to process up to 4.2 GPH of a neat liquid polymer and deliver 0.5 to 4.0 GPM (30 to 240 GPH) of a nominal 0.1 to 2.0% aqueous polymer solution. The 054GS-100 system is modular in design consisting of a liquid polymer injection module and booster module assembly.

AnCAT MODEL 054GS-100 LIQUID POLYMER SYSTEM SPECIFICATIONS

FRAME:	BASE: CONSTRUCTION:	24" W x 24" L x 26" H 304SS BASE
INJECTION MODULE:	PUMP: DRIVE: MOTOR: CAPACITY:	ROTARY-GEAR-TYPE, 316 STAINLESS STEEL POSITIVE TORQUE TRANSMISSION, 4:1 GEAR REDUCTION ¼ HP, 1725 RPM, TENV, CONTINUOUS DUTY NEAT POLYMER FLOWRATE: 0.7 TO 4.2 GPH (16 TO 100 GPD)
BOOSTER MODULE:	PUMP: DRIVE: MOTOR: DISCHARGE:	CENTRIFUGAL-TYPE, CAST IRON, MODIFIED FOR POLYMERS CLOSE-COUPLED .75 HP, 3450 RPM, CONTINUOUS DUTY, ODP 10 – 60 PSI 0.5 – 4.0 GPM
SOLUTION OUTPUT:	PRIMARY FLOW: SECONDARY FLOW: TOTAL FLOW:	0.5 – 4.0 GPM (240 GPH) NONE 0.5 – 4.0 GPM (240 GPH)
CONCENTRATION:	SOLUTION:	PRIMARY 0.2 – 2.0% VOLUME ON VOLUME TOTAL 0.2 – 2.0% VOLUME ON VOLUME
UTILITIES:	ELECTRICAL: WATER:	120/1/60 20 AMPS 40 – 100 PSI 25 GPM CLEAN SOURCE
CONTROLS:	CONTROLLER: LOW WATER: LOW POLYMER:	(OPTIONAL) NEMA 4X W/ TOUCHPAD, POLYMER RATIO, REMOTE START/STOP, POLYMER PUMP READOUT, WATER RATIO, PRIMARY AND SECONDARY FLOW READOUTS, REMOTE SETPOINT AND DOSING CONTROL, AUTO CALIBRATION AND ALARMS (OPTIONAL) FLOW SENSOR WITH AUTO RESTART OR MANUAL RESET (OPTIONAL) OPTICAL SENSORS WITH ADJUSTABLE RANGE 0.15 – 2.0% CONCENTRATION

ENGINEERING SPECIFICATIONS:


AnCAT Model 054GS-100 shall be provided to rapidly dilute, activate and feed emulsion, dispersion and solution polymers at 240 GPH of polymer solution at concentrations to 2%. The system shall contain a four step controlled energy hydraulic circuit which instantaneously dilutes and blends the polymer to it's most efficient state for use in the process. The unit shall be designed with full pressure-controlled, inline inversion capability and shall not be limited by a minimum retention time restriction. The polymer system shall be capable of providing a 15 – 20 PSI pressure boost and shall not rely on available inlet water pressure to discharge the polymer solution product. The system shall be modular in design and shall consist of a polymer injection module, booster module, premix manifold assembly, inlet water solenoid valve, primary and secondary inlet water flowmeter, primary and secondary inlet water flow controllers, proportioning pressure regulator to balance primary and secondary flow circuits, mixing pressure regulator adjustable from 10 to 70 PSI, mixing circuit pressure gauge and inlet water throttling valve.

PLAN & ELEVATION

05GS_DIM


AnCAT 05GS-SERIES

(TYPICAL TO ALL 054GS AND 058GS SYSTEMS)

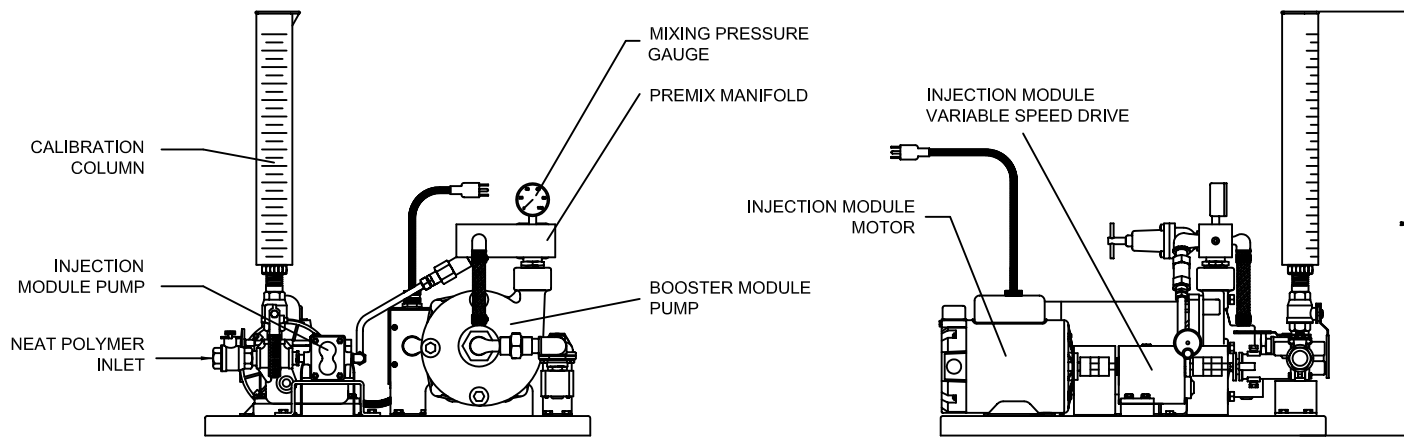

FRONT VIEW

LEFT END VIEW

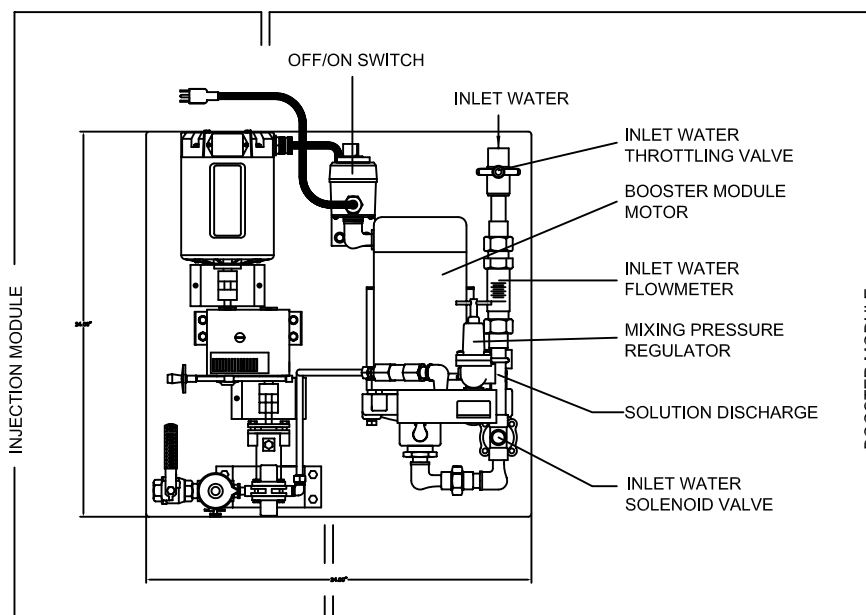

PLAN VIEW

NORCHEM INC.


ELECTRICAL SCHEMATIC

05GS_ELE

AnCAT 05GS-SERIES


(TYPICAL TO ALL 054GS AND 058GS SYSTEMS)

INCOMING POWER
115 VAC/1 PH/60 HZ

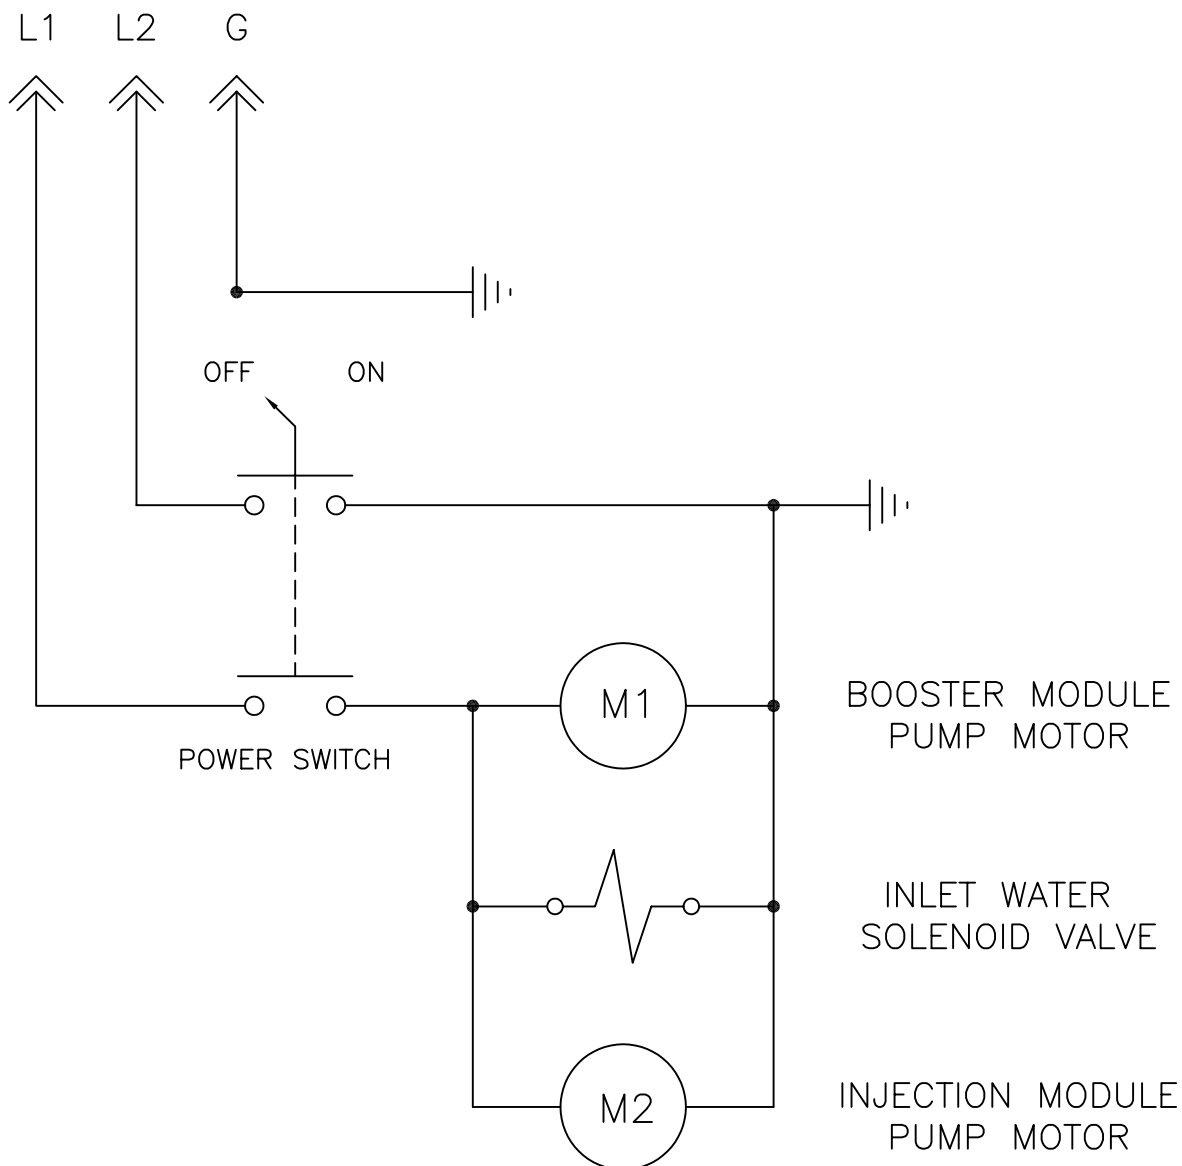

NORCHEM INC.

(TYPICAL TO ALL 054GS AND 058GS SYSTEMS)

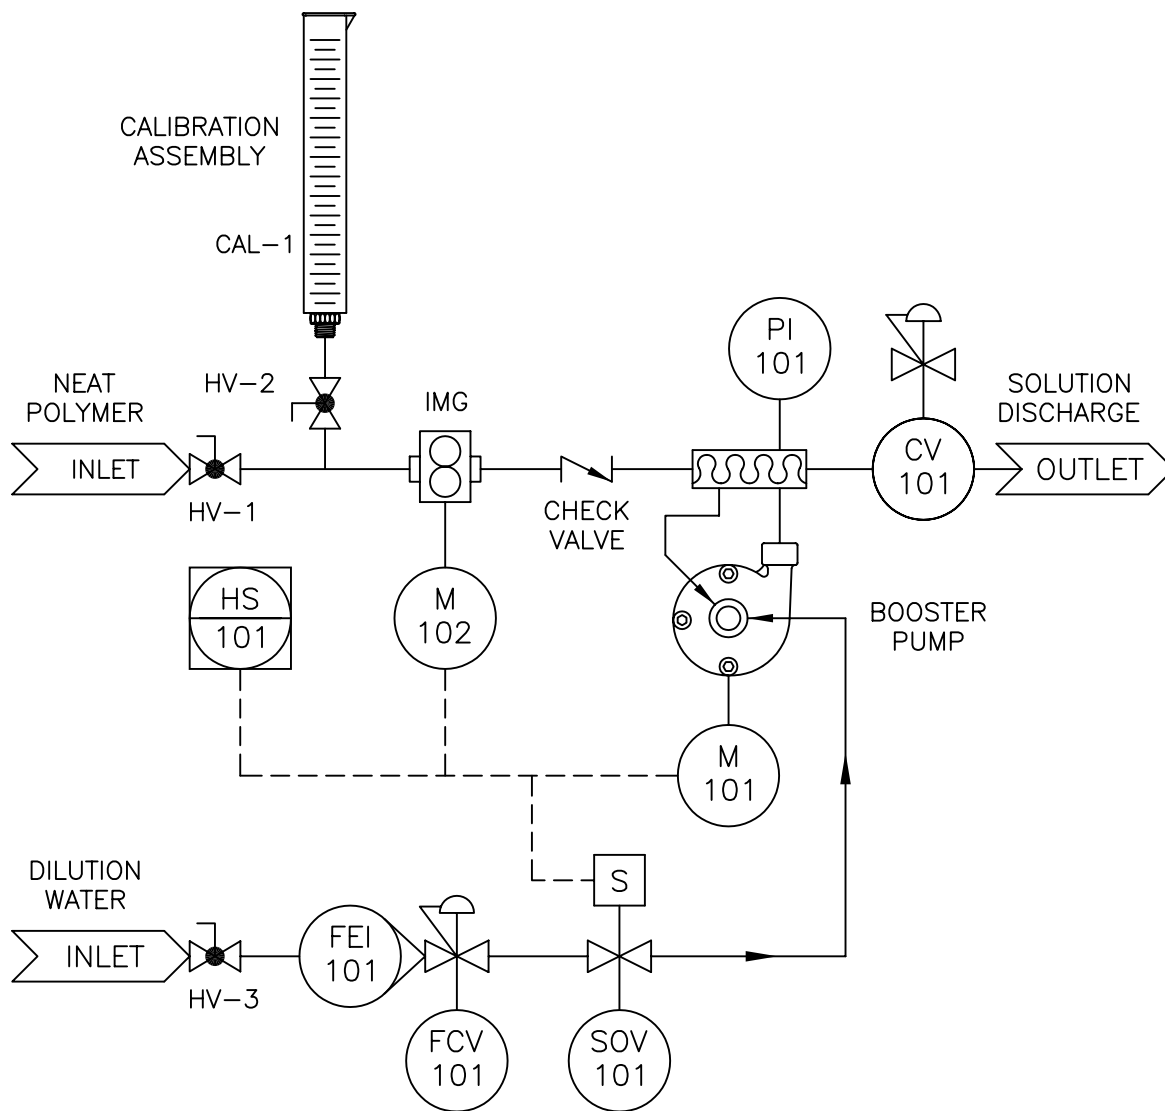

LEGEND

HV-1	POLYMER SUPPLY SHUTOFF HAND VALVE
HV-2	CALIBRATION ASSEMBLY ISOLATION HAND VALVE
HV-3	INLET WATER THROTTLING VALVE
CAL-1	CALIBRATION CYLINDER
IMG	INJECTION MODULE GEAR PUMP
PI-101	MIXING PRESSURE GAUGE
M-101	BOOSTER PUMP MOTOR
M-102	POLYMER INJECTION PUMP MOTOR
SOV-1	DILUTION WATER INLET SOLENOID VALVE
CV-101	MIXING PRESSURE CONTROL VALVE
FEI-101	DILUTION WATER INDICATING FLOW METER
FCV-101	DILUTION WATER FLOW CONTROL REGULATOR
HS-101	OFF/ON SWITCH